



INSTALLATION GUIDE



ETHOS GENESIS AND PHOENIX

All Ethos Woodfires have been tested to and comply with the following standards:
AS/NZS 4013:1999, AS/SNZS 4012:1999, AS/NZS 2918:2001

IMPORTANT:

It is essential that the 130mm stainless steel flue be well sealed and riveted it must also be securely fitted and sealed into the exhaust spigot of the fire, it must also be secured using stainless steel rivets or screws.

MODEL	A	B	C	D	E	F	G	H	I	J	K
GENESIS	310	85	210	870	150	300	940	301	19	1000	300
	310	170	300	955	150	300	940	320	38	1000	300
PHOENIX	310	85	210	870	150	300	940	301	19	1000	300
	310	170	300	955	150	300	940	320	38	1000	300

- With flue shield
- Without flue shield


Note: The Ethos Genesis and Phoenix do not require additional shielding, however, reduced clearances may be obtained using approved heat rated material, check with your local council for their requirements.

FLUE SYSTEM

The flue system used must be the Ethos factory flue kit as this has been specifically designed for optimum performance of the unit. It must be a minimum of 4.2 mtrs in length.

FLOOR PROTECTOR

Hearth Specs (New Zealand) minimum Ash hearth only. eg. ceramic tiles on 6mm hardiflex or similar heat rated material.
Appliance and flue components
Supplied: Ethos Genesis and Phoenix

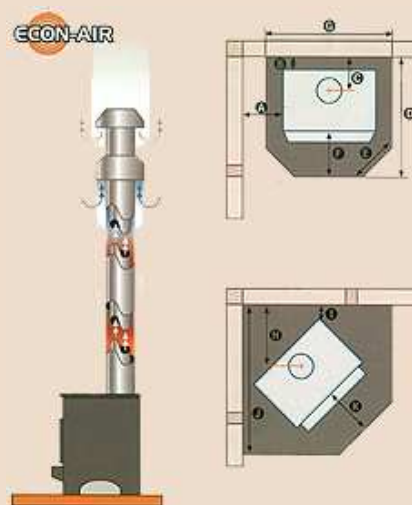

FLUE KIT

- ③ 3 x 1200 130mm SS flues
- ③ 1 x .600 130mm SS flue
- ③ 2 x 1200 200 liners (black)
- ③ 1 x 1200 200 liner (galv)
- ③ 1 x cowl system
- ③ 1 x ceiling plate
- ③ 1 x 200 starter liner (paint finish)

NOT INCLUDED:

- ③ Mounting rails
- ③ Screws and rivets
- ③ Flashing